




PHONE: (909) 993-5700
EMAIL: sales@deluxebuildingproducts.com
LOCATION: 1350 E. Lexington Ave., Pomona, CA 91766



www.DeluxeBuildingProducts.com

Deluxe Diamond Lath Dimpled

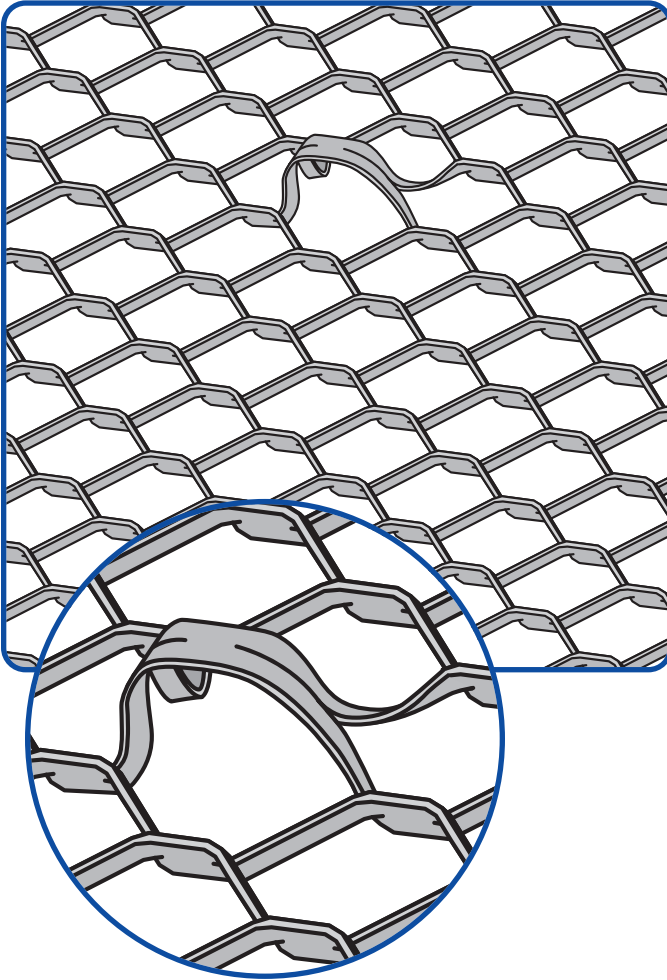

- ✓ Without Paper
- ✓ Available in Galvanized Steel

Deluxe Diamond Lath Dimpled is made with 1/4" dimples in the lath. The dimples provide the necessary minimum 1/4" furring off the sheathing's surface to allow for proper embedment and keying of the scratch coat on all types of walls.

AVAILABLE DIMENSIONS

Sheet Size: 27" x 97"


Weight Per Square Yard (lb/yd²): 1.75, 2.5 or 3.4

Available Materials:

Galvanized Steel

ASTM Codes:

All Accessories are fabricated from prime galvanized steel G60 (G90 upon request) zinc coating by the hot dipped method, conforming to steel and coating specification ASTM A-653/A-653M or zinc alloy meeting ASTM B-69.

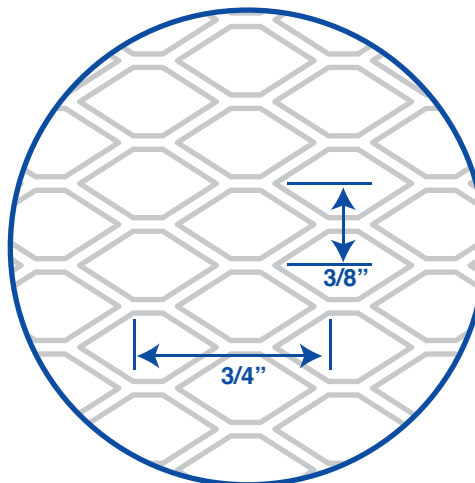

GET A QUOTE

Company: _____

Name: _____

Address: _____

City: _____

State: _____

ZIP: _____

Phone: _____

Email: _____

Quantity: _____

Material: _____

Weight Per Square Yard: _____

Notes: _____







PHONE: (909) 993-5700
EMAIL: sales@deluxebuildingproducts.com
LOCATION: 1350 E. Lexington Ave., Pomona, CA 91766



www.DeluxeBuildingProducts.com

Deluxe Diamond Lath Dimpled

Deluxe Diamond Lath Dimpled is made with 1/4" dimples in the lath. The dimples provide the necessary minimum 1/4" furring off the sheathing's surface to allow for proper embedment and keying of the scratch coat on all types of walls.

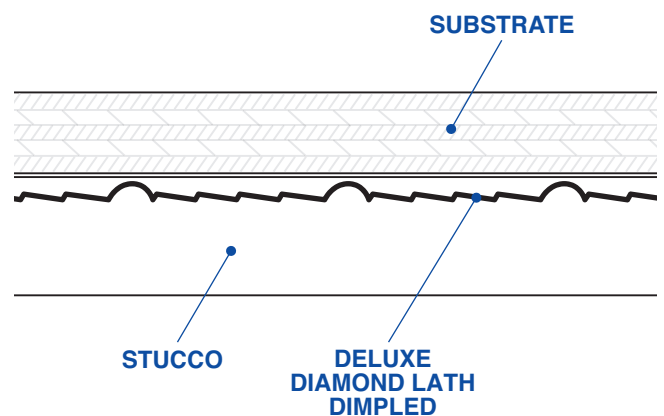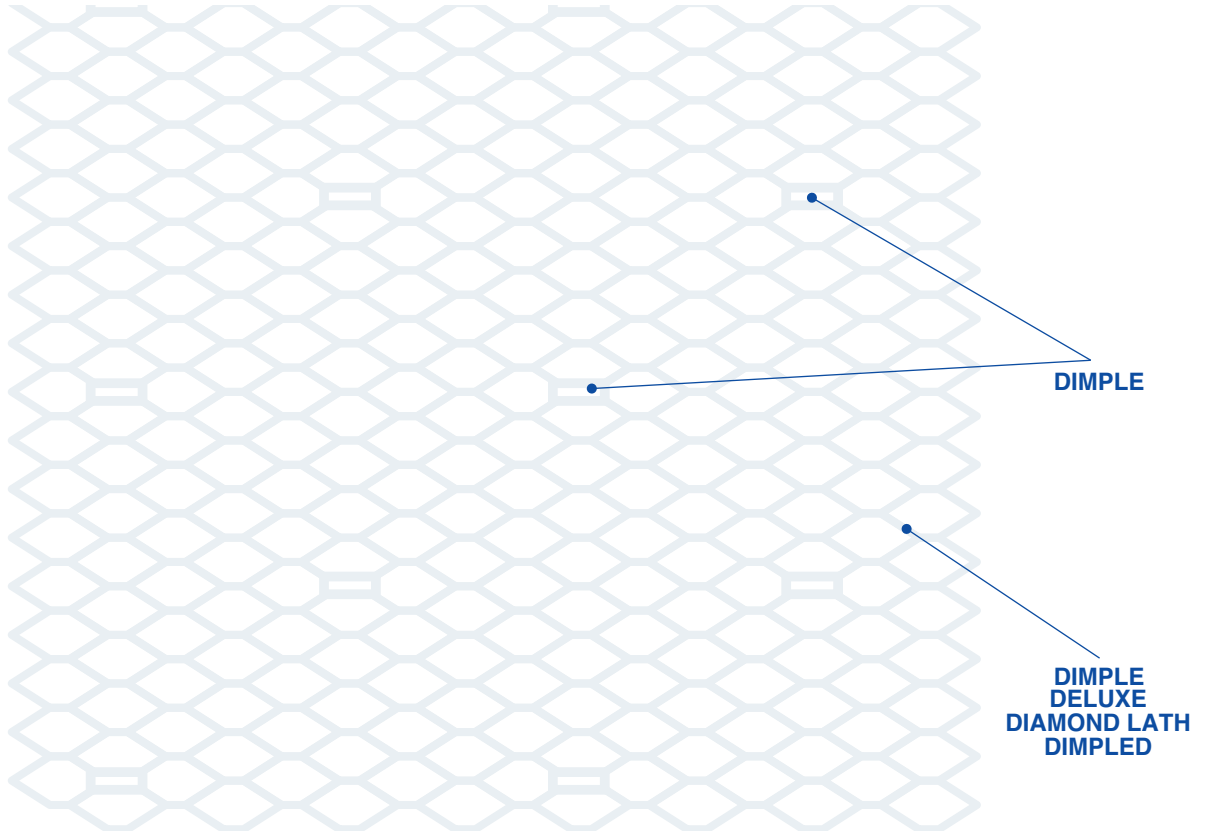

NOTE: This drawing is supplied solely to assist in the selection and application of product manufactured by Deluxe Building Products. This drawing is generic in nature and should not be used in design or construction without an independent evaluation by a qualified Architect or Engineer of Record.

©2025 Deluxe Building Products. All rights reserved worldwide. Product illustrations are for reference only.
CA RESIDENTS: Please review Prop 65 by visiting www.P65Warnings.ca.gov

REV 07.19.25.DDL