


PHONE: (909) 993-5700


EMAIL: sales@deluxebuildingproducts.com





www.DeluxeBuildingProducts.com

Deluxe Diamond Lath V Groove

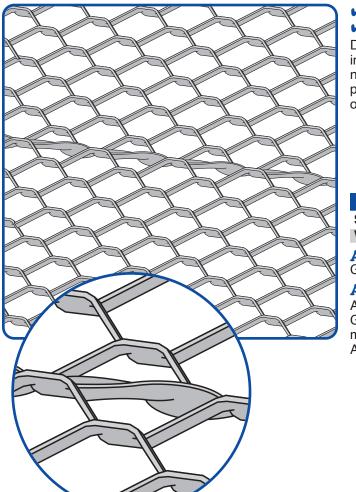

- ✓ Without Paper
- ✓ Available in Galvanized Steel

Deluxe Diamond Lath V Groove is made with five V Grooves in the lath in stead of dimples. These V Grooves provide the necessary 1/4" furring off the sheathing's surface to allow for proper embedment and keying of the scratch coat on all types of walls.

AVAILABLE DIMENSIONS

Sheet Size: 27" x 97"

Weight Per Square Yard (lb/yd2): 2.5 or 3.4

Available Materials:

Galvanized Steel

ASTM Codes:

All Accessories are fabricated from prime galvanized steel G60 (G90 upon request) zinc coating by the hot dipped method, conforming to steel and coating specification ASTM A-653/A-653M or zinc alloy meeting ASTM B-69.


GROOVE 1/4"

GET A QUOTE
Company:
Name:
Address:
City:
State:
ZIP:
Phone:
Email:
Quantity:
Material:
Weight Per Square Yard:
Notes:



PHONE: (909) 993-5700

EMAIL: sales@deluxebuildingproducts.com







www.DeluxeBuildingProducts.com

Deluxe Diamond Lath V Groove

Deluxe Diamond Lath V Groove is made with five V Grooves in the lath in stead of dimples. These V Grooves provide the necessary 1/4" furring off the sheathing's surface to allow for proper embedment and keying of the scratch coat on all types of walls.

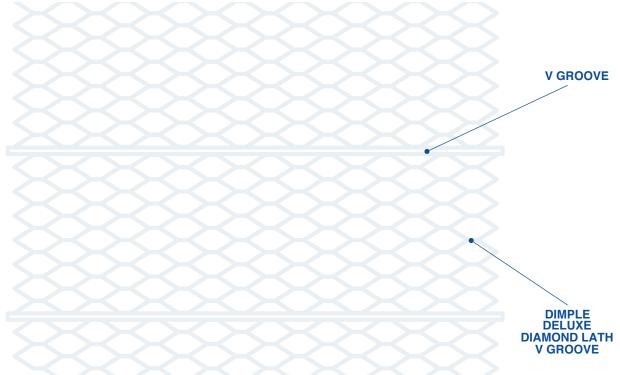

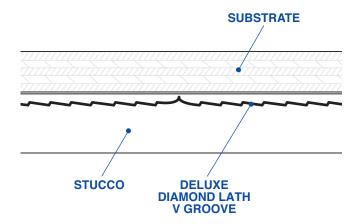

NOTE: This drawing is supplied solely to assist in the selection and application of product manufactured by Deluxe Building Products. This drawing is generic in nature and should not be used in design or construction without an independent evaluation by a qualified Architect or Engineer of Record.