

PHONE: (909) 993-5700


EMAIL: sales@deluxebuildingproducts.com

LOCATION: 1350 E. Lexington Ave., Pomona, CA 91766



www.DeluxeBuildingProducts.com

Deluxe #15 Double V Control Joint

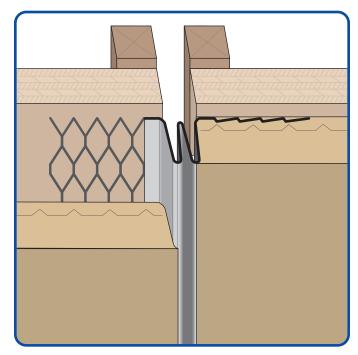

✓ Available In Galvanized Steel

The Deluxe #15 Double V Control joints are used to relieve stresses in large plaster walls and ceilings. This inconspicuous profile provides stress relief and finishing point for the top color coat. This product has expanded flanges on both sides for proper keying of the scratch and brown coat.

AVAILABLE DIMENSIONS

X Sizes: 3/8", 1/2", 3/4" or 7/8"


Length: 120"

Available Materials:

Galvanized Steel

ASTM Codes:

All Accessories are fabricated from prime galvanized steel G60 (G90 upon request) zinc coating by the hot dipped method, conforming to steel and coating specification ASTM A-653/A-653M or zinc alloy meeting ASTM B-69.

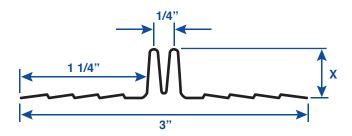



Company: Name: Address: City: State: ZIP: Phone: Email: Quantity: Material: X Size: Length: Notes:



PHONE: (909) 993-5700

EMAIL: sales@deluxebuildingproducts.com


LOCATION: 1350 E. Lexington Ave., Pomona, CA 91766



www.DeluxeBuildingProducts.com

Deluxe #15 Double V Control Joint

The Deluxe #15 Double V Control joints are used to relieve stresses in large plaster walls and ceilings. This inconspicuous profile provides stress relief and finishing point for the top color coat. This product has expanded flanges on both sides for proper keying of the scratch and brown coat.

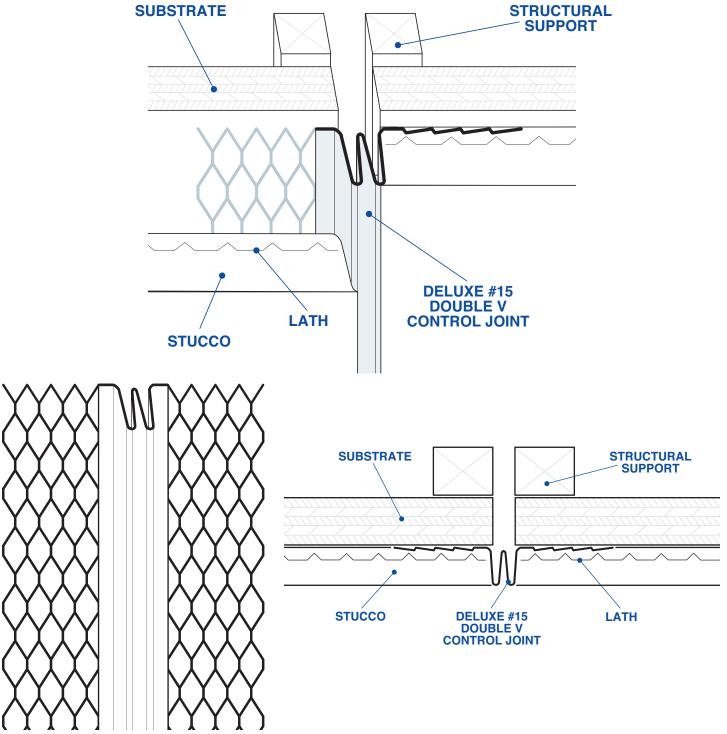

NOTE: This drawing is supplied solely to assist in the selection and application of product manufactured by Deluxe Building Products. This drawing is generic in nature and should not be used in design or construction without an independent evaluation by a qualified Architect or Engineer of Record.