


**PHONE**: (909) 993-5700


EMAIL: sales@deluxebuildingproducts.com





# www.DeluxeBuildingProducts.com

## **Deluxe Low Profile Hat Channel**

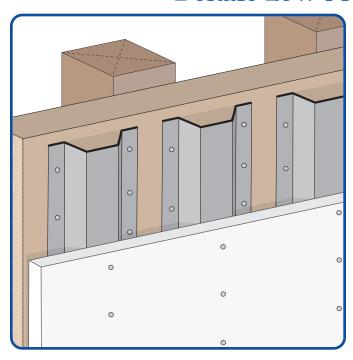

### Available in Aluminum, Bonderized, Copper, Galvanized Steel or Stainless Steel

The Deluxe Low Profile Hat Channel is designed to give less spacing. These 110° Hat Channel are framing components used to space out masonry walls and ceiling assemblies. In concrete wall applications, furring channel is installed vertically to the wall surface using concrete nails or power-driven fasteners. Exterior panels are then attached to the hat channels.

#### **AVAILABLE DIMENSIONS**

X Sizes: Made To Order Y Sizes: Made To Order Z Sizes: Made To Order


Length: 120"

### **Available Materials:**

Aluminum, Bonderized, Copper, Galvanized Steel or Stainless Steel

#### **ASTM Codes:**

All materials meet ASTM A1003 or ASTM A653, Grade 33 or Grade 50 with G-40, G-60 or G-90 minimum zinc coating thickness.

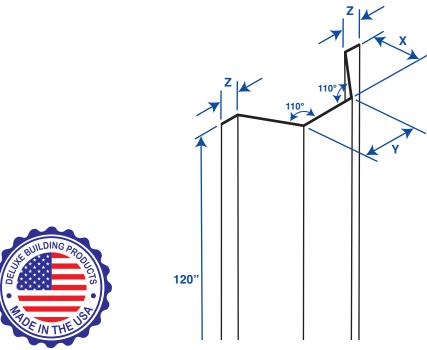


GET A QUOTE
Company:
Phone: Email:
Quantity:
Y Size:
Notes:



PHONE: (909) 993-5700

**EMAIL:** sales@deluxebuildingproducts.com






# www.DeluxeBuildingProducts.com

## **Deluxe Low Profile Hat Channel**

The Low Profile Hat Channel is designed to give less spacing. These 110° Hat Channel are framing components used to space out masonry walls and ceiling assemblies. In concrete wall applications, furring channel is installed vertically to the wall surface using concrete nails or power-driven fasteners. Exterior panels are then attached to the hat channels.

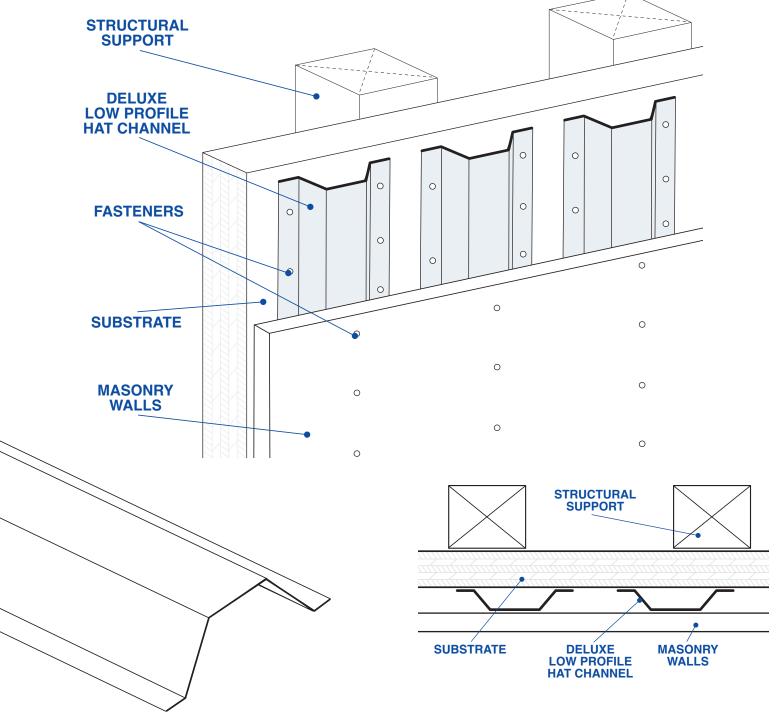

**NOTE:** This drawing is supplied solely to assist in the selection and application of product manufactured by Deluxe Building Products. This drawing is generic in nature and should not be used in design or construction without an independent evaluation by a qualified Architect or Engineer of Record.