

PHONE: (909) 993-5700


EMAIL: sales@deluxebuildingproducts.com

LOCATION: 1350 E. Lexington Ave., Pomona, CA 91766



www.DeluxeBuildingProducts.com

Deluxe F Plaster Molding

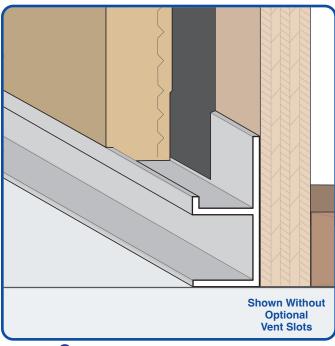

- ✓ Available in Aluminum Alloy (6063 T-5)
- ✓ Available With 1/8" x 1" Vent Slots or Unvented

The Deluxe F Plaster Molding is a plaster stop or control screed for conventional 3-coat stucco, used at the top or base of columns, at the base to create a reveal, or the top of walls at the ceiling. It can also be used at the top of windows to permit the continuation of a horizontal reveal at the window line.

AVAILABLE DIMENSIONS

X Sizes: 1/2" or 3/4"


Available Materials:

Aluminum Alloy (6063 T-5)

ASTM Codes:

AA-M32-C10A21, AAMA 605.2, C841, C1047, C1063, B136-84, B244-97, D4214-98, ND1730-67-TYPE B





	Available Part Numbers
FPM 75-50M	Deluxe F Plaster Molding, 1/2", Mill
FPM 75-50C	Deluxe F Plaster Molding, 1/2", Clear
FPM 75-75M	Deluxe F Plaster Molding, 3/4", Mill
FPM 75-75C	Deluxe F Plaster Molding, 3/4", Clear
FPM 75-V-50M	Deluxe F Plaster Molding, 1/2", Vented, Mill
FPM 75-V-50C	Deluxe F Plaster Molding, 1/2", Vented, Clear
FPM 75-V-75M	Deluxe F Plaster Molding, 3/4", Vented, Mill
FPM 75-V-75C	Deluxe F Plaster Molding, 3/4", Vented, Clear

GET A QUOTE	
Company:	
Name:	
Address:	
City:	
State:	
ZIP:	
Phone:	
Email:	
Quantity:	
Notes:	



PHONE: (909) 993-5700

EMAIL: sales@deluxebuildingproducts.com


LOCATION: 1350 E. Lexington Ave., Pomona, CA 91766



$www. Deluxe Building Products. {\tt com}$

Deluxe F Plaster Molding

The Deluxe F Plaster Molding is a plaster stop or control screed for conventional 3-coat stucco, used at the top or base of columns, at the base to create a reveal, or the top of walls at the ceiling. It can also be used at the top of windows to permit the continuation of a horizontal reveal at the window line.

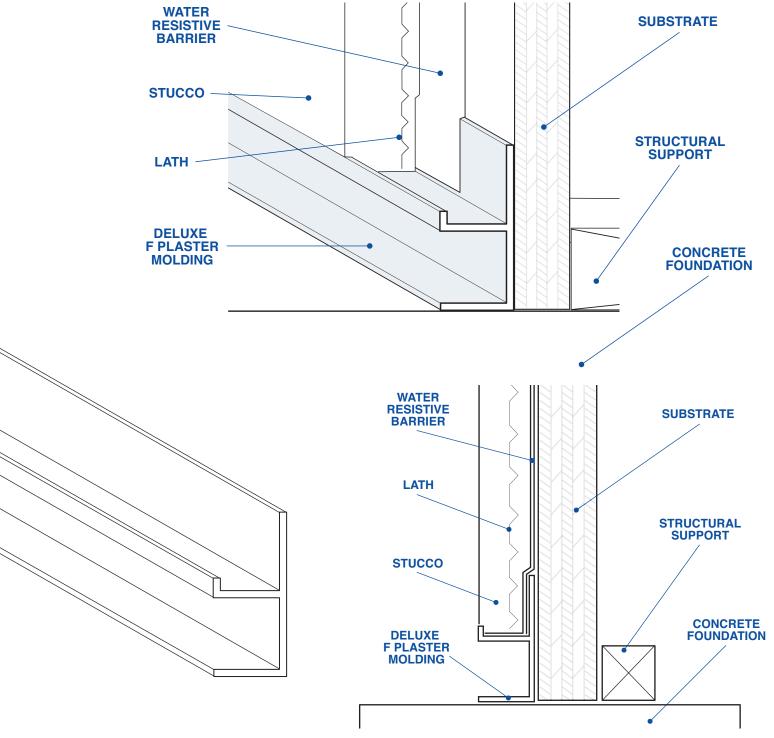

NOTE: This drawing is supplied solely to assist in the selection and application of product manufactured by Deluxe Building Products. This drawing is generic in nature and should not be used in design or construction without an independent evaluation by a qualified Architect or Engineer of Record.