

PHONE: (909) 993-5700


EMAIL: sales@deluxebuildingproducts.com

LOCATION: 1350 E. Lexington Ave., Pomona, CA 91766



## www.DeluxeBuildingProducts.com

### **Deluxe #XJ-15 Double J Control Joint**

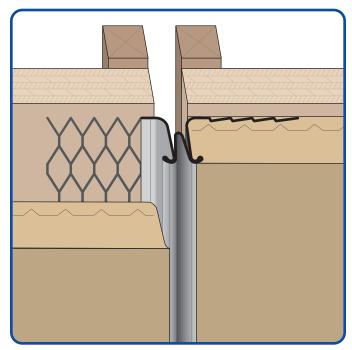

#### Available in Galvanized Steel

Deluxe #XJ-15 Double J Control Joint relieves stresses and strains in large plaster walls and ceilings. This product has expanded flanges for proper keying and the unique design permits the plaster to key underneath the rolled edges for added adhesion while the walls expand and contract under typical conditions. The pull tape on the joint itself provides a clean finish when removed after the finish coat.

#### **AVAILABLE DIMENSIONS**

**X Sizes:** 1/2", 3/4" or 7/8"


Length: 120"

#### **Available Materials:**

Galvanized Steel

#### **ASTM Codes:**

All Accessories are fabricated from prime galvanized steel G60 (G90 upon request) zinc coating by the hot dipped method, conforming to steel and coating specification ASTM A-653/A-653M or zinc alloy meeting ASTM B-69.

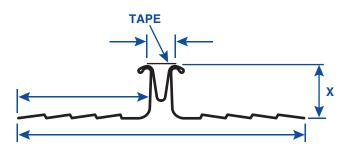




# **GET A QUOTE** Company: Name: \_\_\_\_\_ Address: State: ZIP: \_\_ Phone: \_\_\_\_\_ Email: Quantity: Material: X Size: \_\_\_\_\_ Length:



PHONE: (909) 993-5700

EMAIL: sales@deluxebuildingproducts.com








## www.DeluxeBuildingProducts.com

### Deluxe #XJ-15 Double J Control Joint

Deluxe #XJ-15 Double J Control Joint relieves stresses and strains in large plaster walls and ceilings. This product has expanded flanges for proper keying and the unique design permits the plaster to key underneath the rolled edges for added adhesion while the walls expand and contract under typical conditions. The pull tape on the joint itself provides a clean finish when removed after the finish coat.

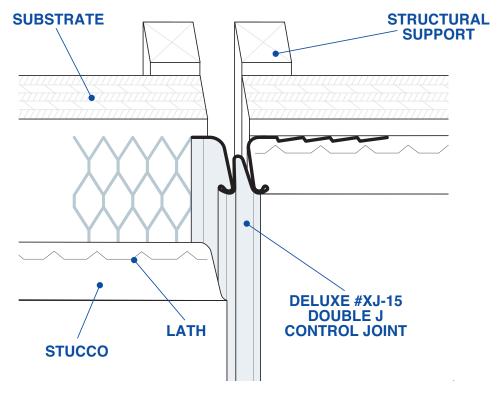



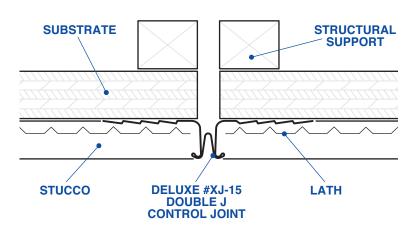

NOTE: This drawing is supplied solely to assist in the selection and application of product manufactured by Deluxe Building Products. This drawing is generic in nature and should not be used in design or construction without an independent evaluation by a qualified Architect or Engineer of Record.